

Hofmann Construction Material Limited is the manufacturer of calcium silicate and fiber cement board, we offers the fire rated systems with superior features, such as thermal insulation, fire resistance, durability, and light weight, to serve the needs of customers in both commercial and industrial facilities as **One stop integrated solution provider** by collaborating with other suppliers.



矽酸鈣板 · 纖維水泥板
Calcium Silicate Board
Fiber Cement Board



Insulated Drywall Partition



Temporary Internal Hoarding



Smoke Barrier

Ventilation/ Smoke Extract Duct



Structural Steel Protection



C Channel Purlin




Fiber Cement Decorative Wall



Solar Panel Structure



E & M Services Enclosure



Roof Cladding



Project Management



Fiber Cement Cladding



Fire Mortar



Corrugated Sheet



Insulated Corrugated Sheet



Galvanized Steel Stud



Fire Collar



Fire Sealant



Mineral Wool Ceilings



Fiber Glass Wool

Fire Rated Systems

Drywall Partition
Fire & Smoke Barrier
Interior Hoarding
Exterior Cladding
E & M Enclosure
Smoke Extract Duct

Fire Rated Products

Fiber Glass Wool
Fire Rated Sealant
Fire Collar
Fire Rated Putty Pad
Mineral Wool Ceiling

Building Material

Fiber Cement Decorative Board
Roof Cladding
Galvanized Steel Stud
Pre-painted Corrugated Sheet

Test Accreditation

BS476 Part4
BS476 Part20
BS476 Part22
BS476 Part24
ISO 10140-2: 2010
ASTM E90-09

Job References

HK-Zuhai-Macau Bridge Main Building
LianTong Immigration Building
HK Electric Lamma Plant
McDonald Restaurant



Hofmann Fire Rated Products for Mandatory Building Inspection Scheme Chapter 502 & 572

Fire Rated Board for E&M Enclosure


In order to fulfill the fire safety requirement of the Mandatory Building Inspection Scheme for Chapter 502 & 572, our E&M Service Enclosure has been tested and complied with both integrity & insulation of BS476 Part 20: 1987 in 60 minutes for the fire protection of electrical meters & cables. Our 9mm thick Calcium Silicate board is weatherproof without any elongation in humidity condition.



相片內容：消防設施現況
(消防安全建築物條例第572章法例)

Fire Rated Door

Hofmann fire rated door complies with BS476 Part 22:1987 FRR -/60/60 from Malaysia test which accredited under HOKLAS recognition. We have both single and double leaf with metal frame & vision panel for installation and the maximum height is up to 2400mm.

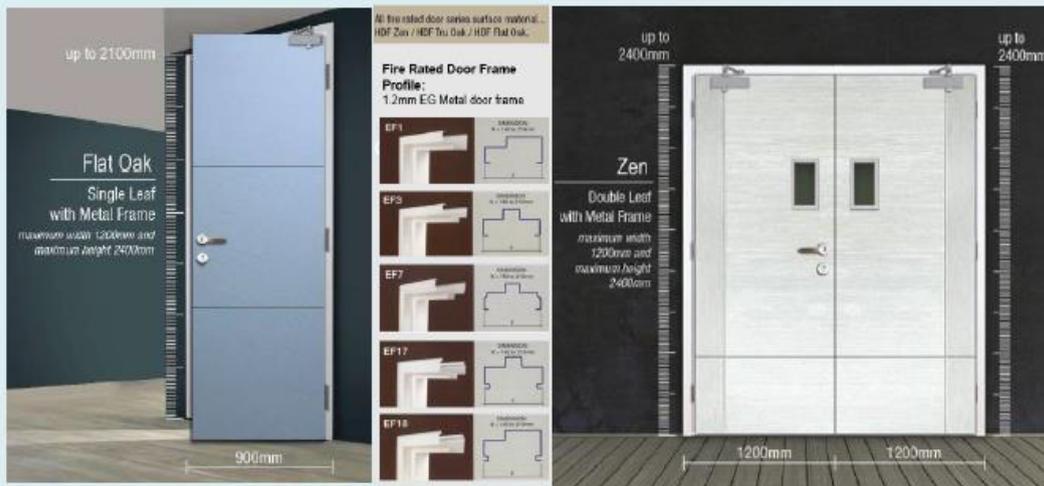

相片內容：消防設施現況
(消防安全建築物條例第572章法例)



建議：
貴處現時之防火門並沒有通過上述法例之防火要求，建議考慮更換合乎現行法例之不低於半小時抗火效能防火門。

HOFMANN CONSTRUCTION MATERIAL LIMITED

Unit 916, Mega Cube, 8 Wang Kwong Road, Kowloon Bay, Hong Kong

香港好夫曼建材有限公司 香港九龍灣宏光道8號創豪坊916室

Tel. no: (852) 3157 1841 e-mail: info@hofmann.com.hk Website: www.hofmann.com.hk

